

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
6 January 2005 (06.01.2005)

PCT

(10) International Publication Number  
**WO 2005/002017 A1**

(51) International Patent Classification<sup>7</sup>: **H02G 15/013**,  
15/113, 15/007, G02B 6/44

(21) International Application Number:  
PCT/GB2004/002437

(22) International Filing Date: 8 June 2004 (08.06.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
0314688.3 24 June 2003 (24.06.2003) GB

(71) Applicant (for all designated States except MG, US):  
**TYCO ELECTRONICS RAYCHEM NV** [BE/BE];  
Diestsesteenweg 692, B-3010 Kessel-Lo (BE).

(71) Applicant (for MG only): **TYCO ELECTRONICS UK  
LTD** [GB/GB]; Faraday Road, Dorcan, Swindon Wiltshire  
SN3 5HH (GB).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **MICHEL**,  
**Maarten** [BE/BE]; Dorpsstraat 52, B-3040 Neerijse  
(BE). **BELLEKENS, Kathleen** [BE/BE]; Ellestraat 26A,  
B-3020 Winksele-Delle (BE).


(74) Agent: **JAY, Anthony, William**; Tyco Electronics UK  
Ltd, European Patent Department, Faraday Road, Dorcan,  
Swindon Wiltshire SN3 5HH (GB).

(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,  
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,  
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,  
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,  
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,  
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,  
ZW.

(84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,

[Continued on next page]

(54) Title: CABLE SPLICE CLOSURE

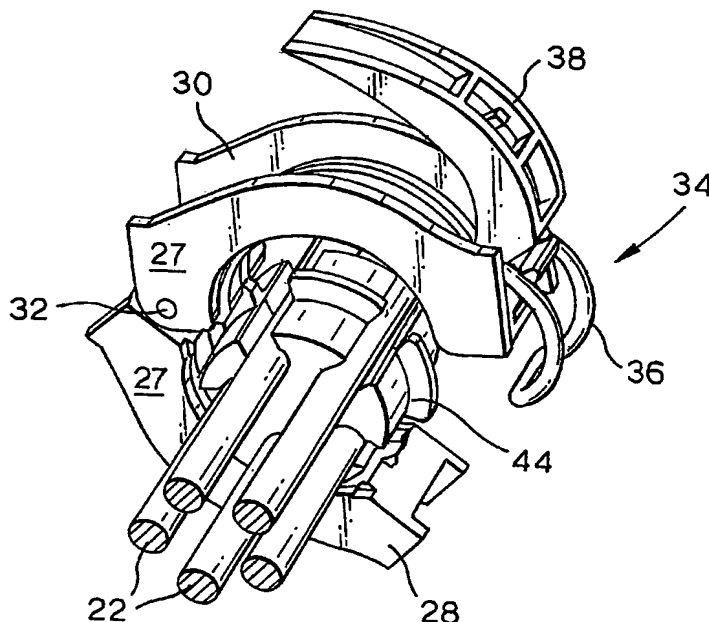

(57) Abstract: A cable splice closure (10) comprising a casing (12) which is capable of being closed around a cable splice, and at least one cable retention means (24) for retaining the end of at least one cable (22) fed into the interior (20) of the closure through or adjacent to a seal (44), the said retention means (24) being capable of being tightened, in use, to hold the seal (44) against the said cable (22) to seal the closure (10) and to retain the said cable (22) substantially independently of any force applied to the retention means (24) by the casing (12).



GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

— with international search report

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Declaration under Rule 4.17:**

— of inventorship (Rule 4.17(iv)) for US only